

SHANTUI

SSL75V-M

Skid Steer Loader





Engine Model:	Kubota V3307-TE5A
Power:	55.4kW/ 2600rpm
Operating Weight:	4,000kg
Bucket Capacity:	0.5m ³

SSL75V-M SPECIFICATIONS

Unit	SSL75V-M
MAIN SPECIFICATION	
Engine Model	Kubota V3307-TE5A
Emission Standard	EPA 4F/EU Stage5/China IV
Rated Power	kW/rpm 55.4/2600
Operating Weight	kg 4000
Rated Payload	kg 1360
Bucket Capacity	m ³ 0.5
L×W×H	mm 3660×1905×2065
ENGINE SYSTEM	
Engine Model	Kubota V3307-TE5A
Rated Power	kW/hp\rpm 55.4/75\2600
Displacement	L 3.331
Stroke	mm 94
Bore	mm 120
WEIGHTS	
Operating Weight	kg 4000
POWER TRAIN	
Travel Speed -F&R(unload)	km/h I: 11.9km/h ; II: 19km/h
TIRE	
Tyre	12×16.5-14PR
HYDRAULIC SYSTEM	
Hydraulic Flow - Standard	L/min/rpm 75
Loader Hydraulic Pressure	MPa 23.5
Hydraulic Flow - High Flow	L/min/rpm 110
Loader Hydraulic Pressure	MPa 23.5
OPERATING SPEC	
Rated Payload	kg 1360
Tipping Load	kg 2720
Breakout Force	kN 25.2
Traction Force	kN 29.5

SERVICE REFILL CAPACITY		
Chain Box, Each Side	L	26
Cooling System	L	11
Engine Crankcase	L	11.2
Fuel Tank	L	90
Hydraulic Tank	L	48

DIMENSION		Unit	SSL75V-M
A	Max.Operation Height	mm	4196
B	Bucket Pin Height	mm	3270
C	Cab Roof Height	mm	2065
D	Max.Height at Bucket Levelled	mm	3063
E	Length without Attachment	mm	2915
F	Length with Standard Bucket	mm	3687
H	Dumping Height	mm	2500
J	Reach Rollback	mm	936
M	Wheelbase	mm	1200
P	Ground Clearance	mm	205
R	Front Turning Radius without Attachment	mm	1338
S	Front Turning Radius	mm	2214
T	Rear Turning Radius	mm	1742
U	Tail Length	mm	1088
V	Center Distance between Two Wheels	mm	1507
W	Bucket Width	mm	1905
G	Dumping Angle at Max.Height	°	43
K	Bucket Angle on Ground	°	27
L	Bucket Rollback Angle At Max.Height	°	91
Q	Departure Angle	°	24.6

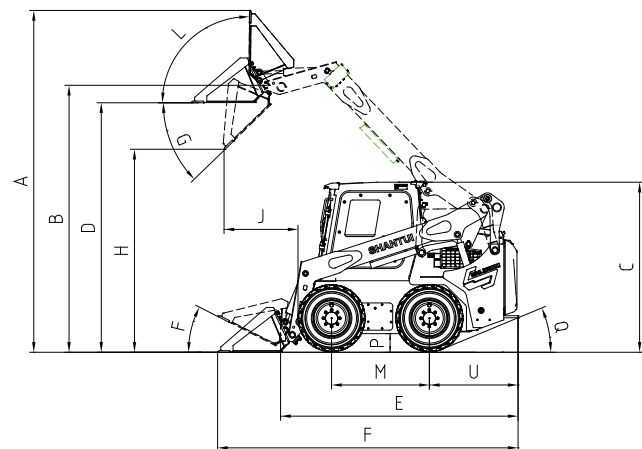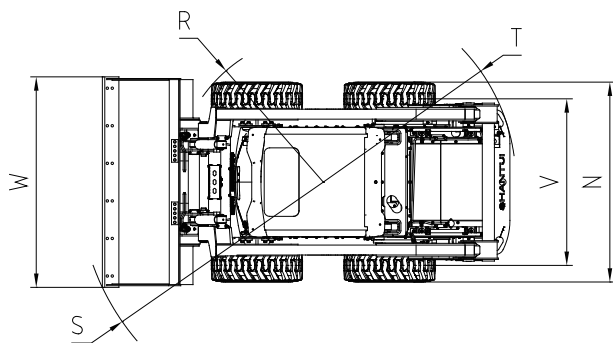

* THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.



Shantui Social

SHANTUI CONSTRUCTION MACHINERY CO., LTD.

ADD: No. 58, G327 Highway, Jining City, Shandong, CHINA

TEL: +86-537-2909369

FAX: +86-537-2311219

EMAIL: trade@shantui.com

WEB: www.shantui.com

SHANTUI
VALUE THAT WORKS